
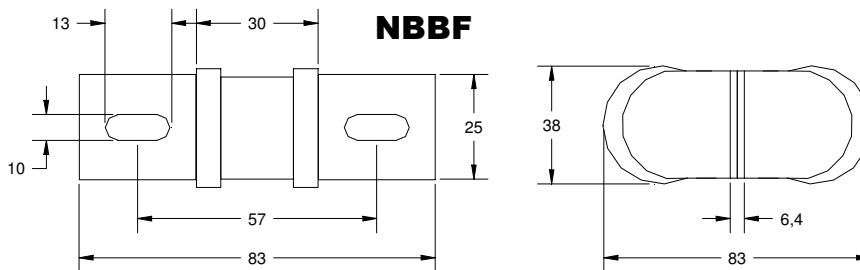
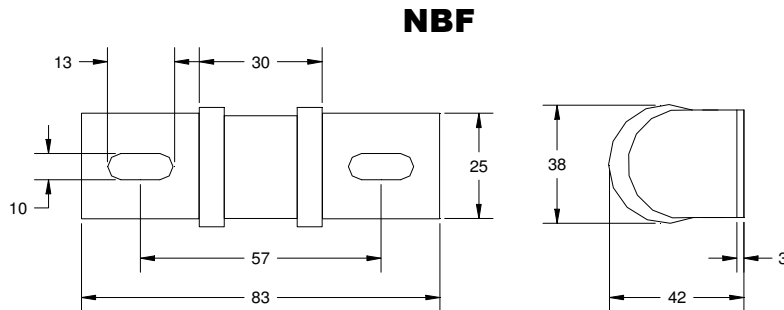


Fusíveis HRC

Tipo BS88, classe aR. Corpo cerâmico. Contatos e calotas em latão ou cobre. Areia de puro Quartzo para extinção de arco voltaico, elementos de baixa perda. 550 VAC, 100 kA de capacidade de ruptura. Não envelhece.


In (A)	REF.	Perdas W
30	30 NAF-25	4
35	35 NAF-25	4,5
60	60 NAF-25	8
75	75 NAF-25	9
100	100 NAF-25	10
125	125 NAF-25	14
150	150 NBF-25	20
200	200 NBF-25	25
250	250 NBF-25	26
300	300 NBF-25	28
350	350 NBF-25	30
400	400 NBBF-25	60
500	500 NBBF-25	62
600	600 NBBF-25	68
700	700 NBBF-25	72

250 Vac


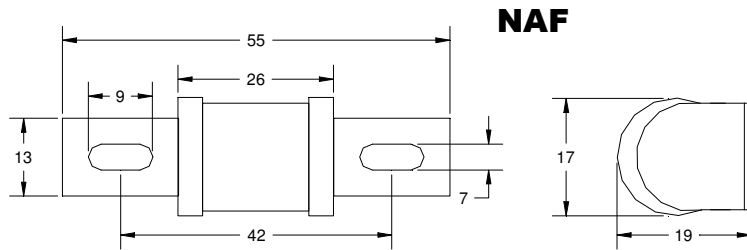


Fusíveis HRC


550 Vac

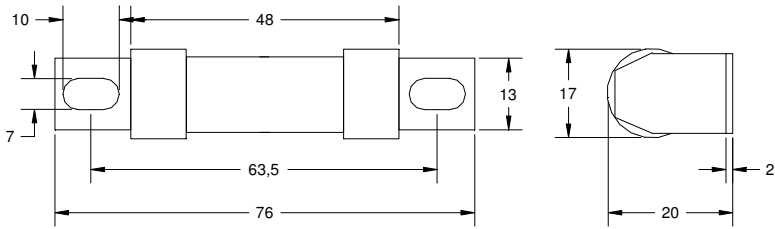


AF

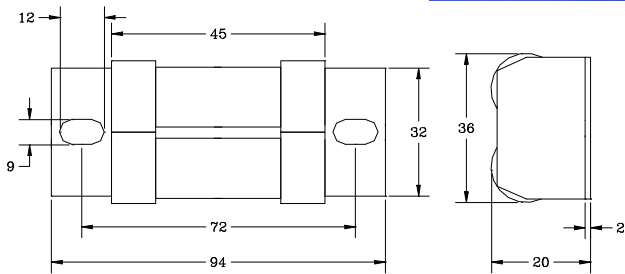

AAF

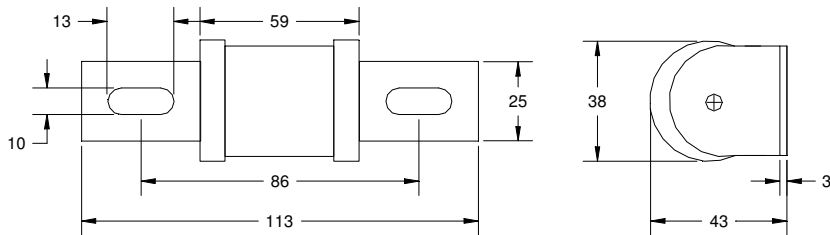

BF

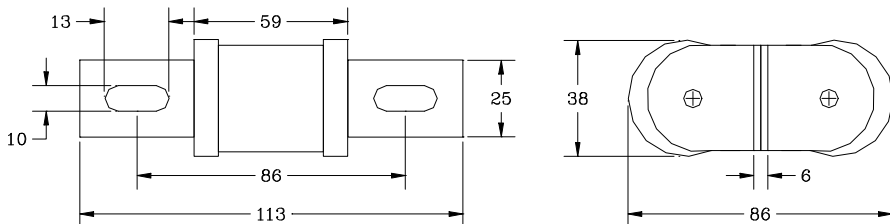

BBF

In (A)	Codigo	Perdas W
45	45 AF-55	12
55	55 AF-55	16
65	65 AF-55	16
75	75 AF-55	17
90	90 AAF-55	28
110	110 AAF-55	28
150	150 AAF-55	28
150	150 BF-55	33
200	200 BF-55	37
250	250 BF-55	37
200	200 BBF-55	42
250	250 BBF-55	60
300	300 BBF-55	66
350	350 BBF-55	66
400	400 BBF-55	75
500	500 BBF-55	75
800	800 CF-55	150
1000	1000 CF-55	150
1250	1250 CF-55	180

